
• WE FIRMLY BELIEVE THAT YOUR HARDWARE SHOULD BE THE LAST THING ON YOUR MIND AS YOU'RE SCREAMING TOW

SYNCTOS 94)

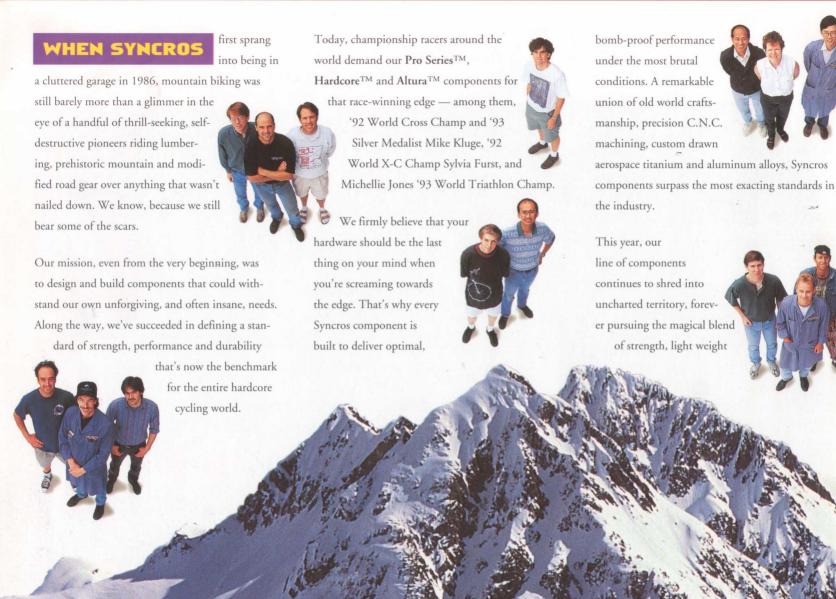

FROM OUR HOME IN THE LUSH COASTAL MOUNTAINS OF BRITISH COLUMBIA OUR DEDICATED TEAM
HAND BUILDS QUALITY, BOMB-PROOF COMPONENTS FOR HARDCORE RIDERS WORLDWIDE.

and ergonomics. From the familiar

Syncros components that are continuously being refined and

perfected, to our new, ultralight

RevolutionTM crankset, the

strongest crankset in the world,

and our new Pro-SeriesTM and


HardcoreTM hubs, we continue to push
the bounds of performance to new and yet

unexplored heights.

At the centre

of our remarkable success is the Syncros team of committed
(often literally) hardcores, local bros'
and world-class designers. Since the
very beginning, we've conceived, designed
and crafted every Syncros component as

though it was our very own, in response to our all out approach to riding, to component building, and to life.






"ALLEGIANCE TO OBSOLETE IDEAS AND PETRIFIED OPINIONS HAS NEVER YET BROKEN A CHAIN OR FREED A HUMAN SOUL." —MARK TWAIN


notorious rejection of the status quo and our loathing of fleeting trends are most in evidence in our rabid devotion to design and testing. A mystical blend of intuition, engineering expertise and the hottest CAD design technology, product development represents the most crucial and intensive stage of Syncros' manufacturing process. For those who, like us, refuse to be held back by convention, the reward is state-of-the-art componentry that leads, rather than follows.


before a gram of metal is ever machined, a component is put through its paces inside a computer using cutting-edge CAD (Computer Aided Design) and 3-D solid modeling technologies. Here, materials and designs are honed to optimize performance and ensure a lifetime of bomb-proof durability.

Then, the real testing begins. First, we equip a test bike with electronically-monitored prototype components. The component-mounted strain gauges and accelerometers are then linked to a computer that collects the real-life data as the bike is run through 24 separate disciplines ranging from 6-foot jumps to 50 M.P.H. downhills. This real-life data then determines the performance requirements of a component, and is used to program the testing machines in the lab.

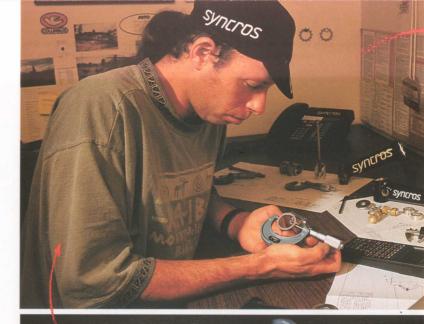



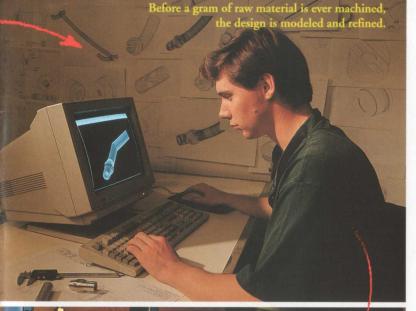

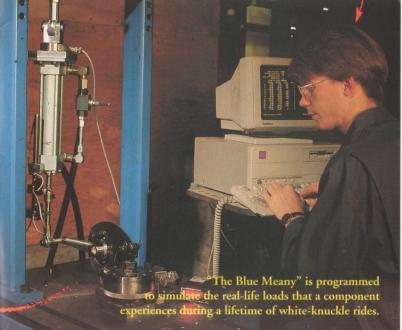

IN A SERIES

of static tests The Blue Meany (our brilliantly sadistic computer-driven testing apparatus)

gradually pushes a new component to the point of destruction (and just a little beyond) while we electronically monitor force, deflection and micro-strain. This allows us to quantifiably compare our lab results with data gathered in the field. This test ensures optimal strength and stiffness for the ultimate bomb-proof ride.

Then we simulate the abuse of an all-out crash by slamming a component with bone-crushing amounts of force in our impact tester. This ensures that every Syncros component is virtually destruction-proof.

Of course, most of the abuse that any component endures is in the years of perpetual excess. That's why we fatigue test our components. Using the real-life data previously gathered in the field, we program The Blue Meany to replicate thousands of gut-wrenching miles — for up to 10,000,000 cycles of stress — all inside the sanctity of our lab.

It's an exhaustive and time-consuming process, but it's the only way to ensure integrity under the pressures of the real world. Not surprisingly, we're the only ones who go to such extreme lengths. It's by far the highest standard in the cycling world.

FINALLY

there's the ultimate test — Human Projectiles. Because computer design and bench-top testing provide only part of the

picture, our team of hardcore pro testers and world-class racers — among them David Baker, Martin Stenger and Allyson Sydor —ride each new design through hell, back through hell, and up and down the world's most ruthless trails and race courses, in a relentless effort to optimize performance, feel and ergonomics.

From our very first '86 CattleprodTM stem to our new, s—t hot, magnesium

Pro SeriesTM front hub, every last Syncros design has pioneered new techniques in mountain bike material application and fabrication. For that rare breed of rider who's driven to be first, what we offer is the edge which comes with blazing one's own trail.





OUR CATTLEPROD™

and CattleheadTM (pat. pending) stems represent the state-of-the-art in modern mountain bike componentry. Using the unique, energy absorbing characteristics of 6061T6 hard-drawn, solution heat-treated aircraft aluminum, our stems can absorb three times the shock of prehistoric Cromoly stems.

Unlike flexy Ti stems, our massive, differentially tapered extension tube and twinbolt monocoque handlebar clamp deliver the ultra-rigid, hairpin precision steering and finger-tip control you need to snake through the maze of rocks and trees.

Our tireless quest for perfection is often revealed by

attention to crucial details. Take the

Syncros Power ZitTM, which is the little
bump on the stem where the weld ends.

As minor as it may seem, the Power Zit
represents a significant development in
stem quality, strength and durability.

While every weld eventually has to end, most ends are positioned out of sight for cosmetic reasons. Notorious for developing hairline shrinkage cracks during cooling, the weld-end is the weakest part of the weld. By building up our Power Zit, grinding away the cracks, and positioning it on the neutral axis of the stem (the axis which experiences the least amount of stress) we produce a significantly stronger and longer-lasting weld. On every single stem we build.

INGENIOUSLY DESIGNED FOR AHEADSET™ SYSTEMS, THE CATTLEHEAD™ FEATURES THE ORIGINAL RECESSED SPLIT COTTER CLAMP MECHANISM, AVOIDING PROTRUDING BOLTS THAT MIGHT END UP SHREDDING YOUR NUTS.

syncros



THE DIFFERENTIALLY
TAPERED EXTENSION TUBE
PROVIDES EXCEPTIONAL
LATERAL RIGIDITY FOR PRECISE STEERING, COMBINED
WITH SUPERIOR VIBRATION
DAMPING FOR A
COMFORTABLE RIDE.

OUR HANG DOGGY™
RETROFIT CABLE-HANGER
FEATURES A SELF-LUBRICATING BRASS CABLE GUIDE
TO KEEP YOUR CABLE RUNNING FREE AND SMOOTH AT
A MERE 25G.



NEW MONOCOQUE HANDLEBAR CLAMP GENERATES HIGH PRESSURE FOR MAXIMUM HANDLEBAR RETENTION.



OUR BRILLIANT NEW WEDGE LOC™ IS DESIGNED TO REPLACE THE STAR-FANGLED NUT FROM AHEADSET SYSTEMS, DELIVERING A FAR SUPERIOR HOLD ON THE STEERER TUBE, AND MANY MORE ADJUSTMENT-FREE RIDES.



HAND-MADE FROM HARD-

STRENGTH AND FATIGUE

RESISTANCE. ONLY 210G

AVAILABLE IN 84 SIZES TO OPTIMIZE FIT.

(1 1/8 x 120 x 00).

DRAWN 6061T6 AIRCRAFT ALUMINUM, AND SOLUTION HEAT-TREATED AFTER WELDING FOR MAXIMUM

WITHOUT EXCEPTION.

high-performance bulged handlebars suffer from one common

and fatal flaw. While the tube-ends are cold-drawn for added strength, everyone forgets about the most stressed part of all —the bulge.

The Syncros solution was to pioneer a new technique of producing a cold-worked bulge. By cold-drawing the center section of the bar, we're able to strengthen the bulge area, which makes our hard-drawn titanium and 7075T78 aluminum handlebars stronger than virtually any other bar on the market. Meanwhile, our taperwall construction delivers

the unparalleled shock absorption
you need to tame radical terrain.

At only 115g, our ultra-light

Pro SeriesTM handlebar is
the lightest full-strength bar in the world. Our
new HardcoreTM bar is built to endure even

the outermost extremes.

Syncros HornsTM continue to be the only true ergonomic bar ends on the market. Designed with an inward cant to match the natural orientation of your hands, Syncros Horns significantly reduce arm strain and increase available power for all-out climbs and sprints.

This year, to make installation even easier, we've redesigned our mounting system. This means the only **Horns** with an ergonomic palm rest are now easier than ever to bolt on. So grab hold of our original **Steerhorns** or **Longhorns** for more aggressive riding positions, or our new **Prohorns** for the truly bent.





NEW PROHORNS WERE DEVELOPED TO RESPOND TO THE DEMANDS OF RACERS LOOKING FOR OUR TRADITIONAL, ERGONOMIC PALM REST IN AN L-BEND CONFIGURATION.

CLOSED-CELL, UV
RESISTANT FOAM PROVIDES CUSTOM SHOCKABSORPTION ON LONG AND
HAIRY RIDES.

INGENIOUSLY DESIGNED TO SIMPLIFY MOUNTING AND REDUCE WEIGHT WHILE RETAINING THE SUPER-COMFORTABLE, ERGONOMIC PALM REST.





NO COMPONENT

suffers more abuse, mud

and neglect, and is more critical to pedalling efficiency, than your bottom bracket. Bottom bracket flex, ball bearing wear and invasive crud exponentially increase friction and rob power from your drivetrain.

PRECISION MACHINED, HEAT-TREATED TI6246 SPINDLE WITH OUR REVOLUTIONARY OUTBOARD-BEARING PLACEMENT DELIVERS A SUPER-STIFF RIDE AT LESS THAN HALF THE WEIGHT OF CROMOLY, PRO SERIES 155G. HARDCORE 180G.



Eight independent
rubber seals keep
our precisionground cartridge
bearings freespinning and virtually
maintenance-free. But

that's only the
beginning. Our
radical outboard-bearing
placement
overcomes
the prob-

lems associ-

ated with titanium spindle flex by dramatically reducing spindle overhang. This unique outboard placement simultaneously increases bearing life and allows our bottom bracket to be compatible with 68mm,

70mm and 73mm BB shells. And because both cups are fully adjustable, you can micro-tune your chainline for a lifetime of perfect shifting.

This year, our **Hardcore**[™] bottom bracket has been redesigned with a revolutionary, super-tough INA bearing system. The unique double-


row angular contact cartridge bearings distribute bearing surface pressure more evenly, allowing them to handle up to three times the load of any (yes, any) other bottom bracket on the market.

All of which translates into less maintenance and

a smoother, more bomb-proof ride at less than half the weight of traditional Cromoly units.



ca uni inc.



THE HARDCORE™ BOTTOM BRACKET


EVEN DISTRIBUTION OF LOAD. BOMB-

PROOF STIFFNESS FOR

INDUSTRIAL GRADE RIDING

FEATURES PRECISION INA DOUBLE-ROW

ANGULAR CONTACT BEARINGS FOR MORE

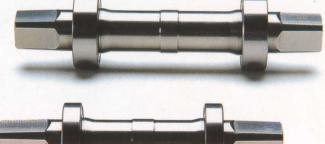

THE PROBLEM

with even the most hyper-

trendy "premium" hubs is that the bearings can't be adjusted, so that after a few months of riding, bearing wear has induced play at the rim and a terminal case of the shakes. Which ironically, is precisely the problem oversized hubs are supposed to overcome.

Our new Syncros front hubs are the only oversize hubs in the world with adjustable bearings. This allows you to adjust the pre-load as your bearings wear (as all bearings will), for more

precise steering response and significantly longer

Designed around a
massive, oversize, heattreated, ceramic-coated
Zicral axle, our new
hubs deliver super-stiff
precision tracking
while virtually

bearing life.

ardous wheel-flop associated with suspension forks.

Our ultra-light **Pro Series**TM magnesium hub weighs in at a remarkable 105g and, for you downhill extremists, our **Hardcore**TM hub employs the same bomb-proof axle and bearing, encased in an indestructible aerospace aluminum shell.





HARDCORE™ 125G

eliminating the haz-



ACCORDING TO

saddle position.

a recent user survey by Mountain Bike Action,

(26.8 x 330)

Syncros seatposts are the most popular high-performance posts in the world.

Never content to rest on our laurels, we've improved it further for '94. Our clamping mechanism has been redesigned with brass rotary pivots to generate stronger, more positive saddle retention, and our new cradle employs twin-tension webs to increase strength and reduce weight. Of course, while most so-called "micro-adjustable" seatposts still rely on awkward, old-fashioned teeth to maintain seat-angle, ours continues to employ the world-famous Syncros twin jacking-bolt mechanism that delivers true infinite micro-adjustment for dialed-in, optimal

Hand-crafted from custom drawn,
heat-treated Ti 3Al2.5V Titanium, our

Pro SeriesTM seatpost is the lightest on the market at an impressive 185g (26.8 x 330mm). The
unique vibration damping characteristics of the Ti
pillar promise the plushest of off-road rides. For heavier, more
gravitationally challenging riders, our HardcoreTM seatpost is precision-turned from hard-drawn 7075T78 tubing to endure a lifetime
of cruel excess.

OUR UNIQUE, INFINITELY MICRO-ADJUSTABLE CAP WITH ROTATING PIVOTS REDUCES STRESS ON THE BOLTS, FOR SUPERIOR STRENGTH, MICROADJUSTABILITY AND TRULY DIALED GEOMETRY.




AVAILABLE IN 330 AND 425MM LENGTHS, IN ALL STANDARD AND NON-STANDARD SIZES.



HARDCORE™ 7075T78, 210G (27.2 x 330)

NEARLY HALF THE WEIGHT

of conventional Ti bolt kits, MPRTM (Mo' Power Racing) Fasteners are crafted from wrought titanium and Zicral alloys. Developed specifically for aerospace applications, Zicral has nearly twice the strength-to-weight ratio of Ti. But that's only part of the story.

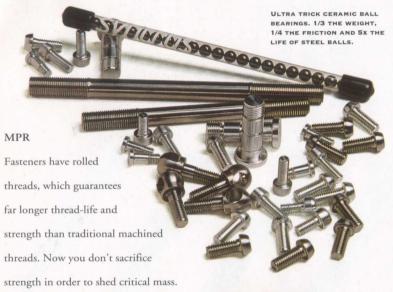





CRAFTED FROM ZICRAL, A HIGH-TECH, AEROSPACE FASTENER THAT'S HALF THE WEIGHT
OF TI, OUR ULTRALIGHT Z-BOLT IS CERAMICCOATED AND FEATURES SUPER-TOUGH COLD
ROLLED THREADS FOR EXTRAORDINARY WEAR
RESISTANCE. TEAMED WITH OUR NEW,
HOLLOW "PEACE WEDGE", THE LIGHTEST
STEM BOLT IN THE WORLD IS NOW A
FEATHERWEIGHT 25G.



SELECTED BY

the Coors Light Racing

SYNCROS

Team for a second consecutive year, the AlturaTM road racing stem is more

than 100g lighter than any forged alloy stem in the world. Despite this phenomenal light weight, it's still significantly more rigid and precise than any other stem in the peleton. The Altura's unique super-strong bi-oval extension tube with differential wall thickness delivers hairpin precision steering and

unmatched rigidity for crucial climbs

and sprints.

The road RevolutionTM crankset delivers the same incredible stiffness and strength as our off-road version, with a PowerdiscTM

configuration for road racing chainrings. Custom drawn, tubular True Temper arms provide near-

ly 100% efficient power transmission to your rear

Reducing mass and friction is critical in the bid against time. At an incredible 105g, our superlight, ultra-stiff Ti bottom brackets have 8

> independent rubber seals to keep you spinning friction-free.

What's more, our radical outboard-bearing placement makes

> them by far the stiffest unit on the road. And they're compatible with all

high-performance roadcranks, including the new Dura

AceTM.

Increasingly the standard in worldclass competition, our Altura Ti seatposts deliver the ultimate in

superlight performance at just 165g (27.2 x 230mm). And for riders who hold to the virtues of aluminum, our superstrong 7075T8 aluminum post leads the pack, at a mere 185g (27.2 x 230mm). This year, we've redesigned

our micro-adjustable cap with brass

rotary pivots for superior seat retention and effortless seat fine-tuning your riding position just got even easier.

And our ingenious Titanium Crank-O-MaticTM crank bolt and puller weigh



in at just 18g per pair. Precision machined from Ti6Al4V, they're tiodized to prevent seizing.







TECHNICAL **SPECIFICATIONS**

CATTLEPROD™ STEM

Material:

Stem: Wrought 6061T6 aluminum, hand TIG welded, solution heat treated & artificially

> aged. Epoxy powder coated or polished fiinsh

4340 Cromo, heat treated, zinc plated Pinch bolts: Expander bolt: Ceramic coated Zicral alloy

Thread: M8 x 1.0 cold rolled Weight: 210g - 120 x 00 x 1"Ø polished

Sizes: Length:

110 - 160 x 10mm Rise: Low 00, High 150 Ouill: Ø-7/8" (22.2mm) for 1" fork Ø- 1" (25.4mm) for 1 1/8" fork Ø- 1 1/8" (28.6mm) for 1 1/4" fork

CATTLEHEAD™ STEM

Material:

Wrought 6061T6 aluminum, hand TIG Stem: welded, solution heat treated & artificially aged. Epoxy powder coated or polished

4340 Cromo, heat treated, zinc plated Cap/Wedgeloc: Die cast AZ91D magnesium, 27g

Thread-M6 x 1 0

Weight: 175g - 120 x 0° x 1" Ø polished Sizes:

Length: 110 - 160 x 10mm Rise: Low 0°, High 15°

Steerer clamp: Ø-1" (25.4mm) for 1" fork Ø- 1 1/8" (28.6mm) for 1 1/8" fork

Ø- 1 1/4" (31.8mm) for 1 1/4" fork

ALTURAM STEM:

Material:

Stem: Wrought 6061T6 aluminum, hand TIG welded, solution heat treated & artificially aged. Epoxy powder coated or polished Pinch bolt: 4340 Cromo, heat treated, zinc plated Expander bolt: Ceramic coated Zicral allov

M8 x 1.0 Thread: 185g - 110mm

Weight: Sizes:

70 - 150mm x 10mm (110 - 130 x 5mm) Length:

-17.50 (strada) Angle: -30.00 (pista) 0.00 (tri)

Quill: Ø- 22.2mm Clamp: Ø- 26.4mm, 26.0mm

ALTURA™ AHEADSTEM:

Material:

Stem: Wrought 6061T6 aluminum, hand TIG welded, solution heat treated & artificially aged. Epoxy powder coated or polished

Pinch bolt: 4340 Cromo, heat treated, zinc plated Cap/Wedgeloc: Die cast AZ91D magnesium, 27g Thread: M6 x 1.0

Weight: 160g - 110mm Sizes:

> Length: 110 - 130 x 5mm Angle: -17.50 (strada) Quill: Ø- 22.2mm Ø- 26.4mm, 26.0mm Clamp:

CRANK-O-MATIC™

Material:

Bolt: Ti6Al4V titanium M8 x 1.0 cold rolled

thread Washers: Bronze thrust bearings Hard anodized Zicral allov Cap: Thread: M22 x 1 roll formed

Weight: 18g/pair

PRO SERIES TI BOTTOM BRACKET:

Material:

Spindle: Ti 6Al 2Sn 4Zr 6Mo titanium Hard anodized 6061T6 aluminum, cold Cups: rolled thread

Rings: Al 7075T6, right hand thread - gold anodized.left hand thread - black anodized.

Italian thread red anodized Bearings: 2 - SKF, 61903-2RS

Weight: 155g - 103mm spindle Sizes:

Spindle: 103, 105, 107, 109, 111, 113, 117, 5, 122, 5, 127.5, 131mm

1.370 x 24T.P.I., LH, RH (English) Cups: 36mm x 24T.P.I. RH (Italian)

HARDCORE TI BOTTOM BRACKET:

Material:

Spindle: Ti 6Al 2Sn 4Zr 6Mo titanium Cups: Hard anodized 6061T6 aluminum, cold

rolled thread

Al 7075T6, right hand thread - gold Rings: anodized left hand thread - black anodized.

Bearings: 2 - INA, 3903-2RS 180g - 113mm spindle Weight:

Sizes:

107, 109, 113, 117.5, 122.5, 127.5, 131mm Spindle: Cups: 1.370 x 24T.P.I., LH, RH (English)

Z-BOLTIM

Material:

Bolt: Ceramic coated Zicral Alloy, heat treated Wedge: 6061T6 aluminum, hollow section

Weight: Bolt:

18g Wedge: 9g 1" Ø Sizes:

> Thread: M8 x 1.0 cold rolled thread Wrench: 6mm Allan

Wedge: Ø- 22 2mm Ø- 25.4mm Ø- 28.6mm

PRO SERIES HANDLEBARS

Material:

Al-7075T78 cold drawn, bulge formed, taper wall aluminum, hard black anodized or

polished finish

3AL2.5V bulge formed titanium, hand Tipolished finish

Al - 115g Weight: Ti - 155g

Bends: 50 bend, 00 unbent

HARDCORE HANDLEBARS

7075T78 cold drawn, bulge formed, taper Material: wall aluminum, hard black anodized or polished finish

Weight: 145g

Bends: 50 hend, 00 unbent

PROHORNS

Material:

Horns: 6061T6 aluminum, hand TIG welded, epoxy powder coat finish Bolts: 4340 Cromo, heat treated, zinc plated

Weight:

STEERHORNS™

Material:

Horns: 6061T6 aluminum, hand TIG welded. epoxy powder coat finish

Bolts: 4340 Cromo, heat treated, zinc plated

Weight:

BIGHORNSTM

Material:

6061T6 aluminum, hand TIG welded. Horns: epoxy powder coat finish

Bolts: 4340 Cromo, heat treated, zinc plated Weight: 200g

PRO SERIES SEAT POST

Material:

Pillar: Ti3Al2.5V titanium, natural finish Bolts: 4340 Cromo, heat treated 6061T6 aluminum, heat treated Cap: 6061T6 aluminum, heat treated Cradle: Brass alloy 360 Rotary nuts:

Weight: 185g - 26.8 Ø x 330mm

Sizes: Ø 26.8, 27.0, 27.2, 27.4, 28.6, 29.2, 29.4, 29.6, 29.8, 31.6, 31.8, Length 225 & 330mm

HARDCORE SEAT POST

Material:

Pillar: 7075T78 cold drawn seamless aluminum, black anodized Bolts: 4340 Cromo, heat treated Cap: 6061T6 aluminum, heat treated Cradle: 6061T6 aluminum, heat treated Rotary nuts: Brass alloy 360

& 425mm

REVOLUTION™ CRANKSET Material:

Weight:

Sizes:

Custom drawn True Temper 4130 Arms: cromoly, epoxy powder coat finish Spider: 7075T6 aluminum, anodized black Bolts: Ti 6-4 titanium, cold rolled thread Power plate: 2024T3 cold forged aluminum

210g - 27.2 Ø x 330mm

Ø 26.0 - 31.8mm x 2mm, Length 230, 330

Weight: 410g - 175mm Sizes:

> Length: 165, 170, 172, 5, 175, 177, 5, 180mm Fits:

109mm bottom brackets 74 - 110 bolt pattern (mtn) 58 - 94 bolt pattern (compact) 130 bolt pattern (road)

PROSERIES HUB

Material-

Shell: ZK60AT5 magnesium, heat treated Spindle: Ceramic coated Zicral alloy, M12 x .75 cold rolled thread

> 7075T6 aluminum, hard anodized. M12 x .75 cold rolled thread

Locknuts: Weight: 105g

HARDCORE HUB

Material: Shell:

6061T6 aluminum, heat treated, hard anodized Spindle: Ceramic coated Zicral alloy, M12 x .75 cold

rolled thread

Locknuts: 7075T6 aluminum, hard anodized, M12 x

.75 cold rolled thread

Weight: 125g

MPR FASTENERS

Material: Ti6Al4V Titanium, Ceramic coated Zicral alloy, roll formed threads

Weight Item #pieces Weight Savings Rear derailleur 9.2g 15.0g Front derailleur 2.3g 6.0g Control lever 5.4g 10.5g Front brake 12.7g 15.3g Rear brake 15.2g 12.8g Hubs 40.3g 37.0g Crank 23 31.2g 41.0g 45 Total 116.3g 137.6g

HANG DOGGY CABLE HANGER

Material: 6061T6 aluminum black anodized Brass alloy 360

Weight: 30g CANADA OUTDOOR GEAR CANADA, 2708 RUE DIAB, VILLE ST-LAURENT, QUÉBEC CANADA H4S 1E8 TEL: (514) 332-1320, FAX: (514) 335-1691

U.S.A.

SYNCROS APPLIED TECHNOLOGY INC., 975 VERNON DRIVE, VANCOUVER B.C. CANADA V6A 3P2 TEL: (604) 251-4505. FAX: (604) 251-4506

GERMANY

BIKE ACTION GMBH, GROß-UMSTÄDTER STR. 28, 6110 (64807), DIEBURG TEL: (49) 6071-92-34-0, FAX: (49) 6071-8-16-05

SWITZERLAND, FRANCE, AUSTRIA, BENELUX, ENGLAND SEVYSA SA, Z.I. DE LA PLAINE 1123 ACLENS TEL: (41) 21-869-90-71, FAX: (41) 21-869-90-84

ITALY

107 IMPORTS S.R.L., STRADA SUPREGA N. 28, 10132 TORINO TEL/FAX: (39) 11-899-00-63

SPAIN

BIKE PLANET S.L., PO DE LA HABANA 56, 7B, 28036 MADRID TEL: (34) 1-564-22-32, FAX: (34) 1-564-56-11

AUSTRALIA

SPEKTRUM SPORTS ENT., 44 CANOON Rd., TURRAMURRA 2074 NSW TEL: (61) 2-44-7204, FAX: (61) 2-449-7605

JAPAN

A&F CORPORATION, 1-1-9 OKUBO, SHINJUKU-KU, TOKYO 169 JAPAN TEL: (81) 3-3209-7575, FAX: (81) 3-3209-7250

SINGAPORE

EWAN PTE., 257 SELEGIE RD., #01-297 SELEGIE COMPLEX, 0718 TEL: (65) 339-7388, FAX: (65) 339-5168


PHOTOGRAPHY: TONY REDPATH, JEN WALTON, LEANNA RATH-KELLY, JOHN KELLY, TOM MORAN, KERRY PHILLIPS, JULIAN ZGODA

DESIGN: SHELDAN STUDIOS PRINTING: WAGNER TELDON

NOTE: THE FOLLOWING TRADEMARKS ARE OWNED BY SYNCROS APPLIED TECHNOLOGY INC.: ALTURA, BIGHORNS, CATTLEHEAD, CATTLEPROD, CRANK-O-MATIC, HAMMER 'N CYCLE, HARDCORE, MPR, POWERDISC, PROHORNS, PRO SERIES, STEERHORNS, LONG HORNS, POWER ZIT, HANG DOGGY, HORNS, SYNCROS

OUR GUARANTEE: WE GUARANTEE OUR COMPONENTS, WHEN USED REASONABLY, TO BE FREE OF DEFECTS IN MATERIALS AND WORKMANSHIP DURING THE NORMAL LIFE OF THE PART.



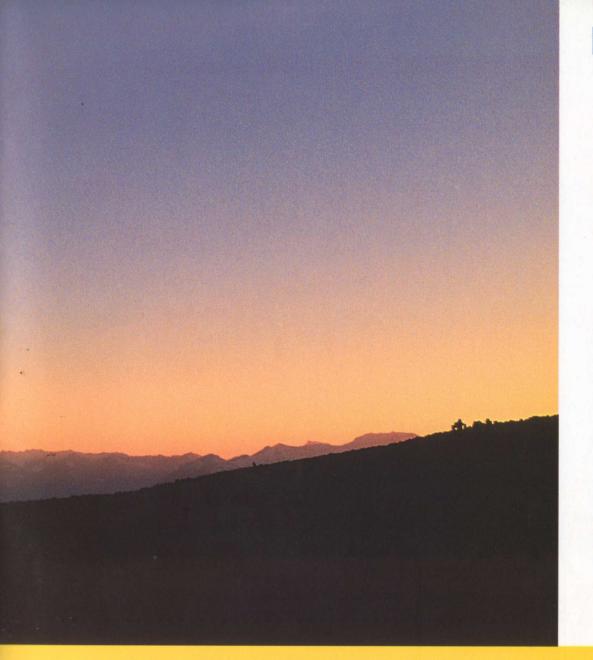

WHETHER SCREAMING

down a narrow single track through lush coastal mountains, or rolling along a swaying country road on a warm summer's night, riders share in the rare and remarkable gifts of nature. With this privilege comes the obligation to tread lightly, and to respect those who share our experience, be they pedestrians, equestrians, or our fellow riders.

As has been the tradition since our earliest years, we continue to print this catalogue on recycled paper, and avoid the use of bulky, wasteful, hyped-up product packaging. This saves trees and electricity, lightens the burden on our landfills, and reduces the emissions in our air. In turn, we ask that, when the time comes, you recycle this brochure, as well as the minimal packaging that we use for our products.

The breathtaking pleasure which riding affords seems, sadly, to be a fleeting one. Please respect and protect our environment, that the generations hereafter might share in our exhilaration and delight.

DEMAND OUR BOMBPROOF COMPONENTS BY NAME







SYNCROS



975 Vernon Drive, Vancouver B.C. V6A 3P2 CANADA • Printed in Canada on recycled paper.